



Janisol Arte 2.0

New developments and innovations for the
Janisol Arte system

JANSEN

Janisol Arte 2.0

The new generation



Simplified fabrication; new materials for profiles

The second generation of the Janisol Arte window system now offers profiles made from stainless steel and Corten steel as well as a wide range of profiles. The integrated weatherstrip groove simplifies and speeds up fabrication. A large selection of glazing beads is also available in a variety of different materials.

The wide range of opening types is ideally suited for the renovation of old windows but also for modern residential construction. With the narrowest profile face widths of only 25 or 40 mm for fixed glazing and a basic depth of 60 mm, intricate yet stable constructions with a large proportion of glass and excellent thermal insulation can be created.

Design benefits

- Inward and outward-opening fixed glazing/window vents
- Single and double-vent windows
- Inward-opening side-hung, bottom-hung and double-vent windows
- Outward-opening side-hung, top-hung, double-vent, horizontal pivot and vertical pivot windows, projected top-hung windows
- Vent sizes of 1000 × 2400 mm
- Vent weight of up to 150 kg
- Unit thicknesses from 20 to 47 mm
- U_w value from 0.8 W/m²K
- Multi-point window locking
- New materials for profiles: stainless steel and Corten
- Burglar resistance tested in accordance with EN 1627 up to RC2

Fabrication benefits

- Composite technology tested in accordance with EN 14024
- CE classification in accordance with EN 14351-1
- Optimum weldability of the profile frame due to the ZF surface finish
- Mechanical strength tested in accordance with EN 13115
- Impact resistance tested in accordance with EN 13049



Janisol Arte 2.0



Janisol Arte 2.0 stainless steel



Janisol Arte 2.0 Corten

Janisol Arte vertical pivot window

The new Janisol Arte pivot window may be used as a project solution.

- Vent weights of up to 120 kg
- Tested unit: 1570 × 1570 mm
- Vent weight of up to 20 bis 47 mm, glazing installed by means of wet glazing



Janisol Arte horizontal pivot window

The new Janisol Arte horizontal pivot window has been successfully CE marked. Vents of up to 1400 × 1600 mm can be constructed as manual or motorised versions.

- Vent weights of up to 100 kg
- Watertightness 8A - 450 Pa
- Air permeability up to class 4
- Sound reduction up to 40 dB




Janisol Arte sliding doors

With the extremely slimline steel profile system Janisol Arte, large sliding doors can be created with narrow face widths and a high degree of stability. Originally developed by Jansen for the reconstruction of historic windows, Janisol Arte now offers architects and developers the opportunity to create large glass fronts.

- Unit sizes of up to 3000 × 2500 mm (W×H)
- Max. weight of 150 kg per leaf
- Insulating glass of 20 to 34 mm
- U_w value of 1.5 W/m²K
- Welded steel half profiles in combination with glass fibre-reinforced high-performance plastics (100% recyclable) produce particularly stable frames
- Profile face widths of just 40 mm ensure increased light penetration and also increase the energy efficiency of the building
- CE marking in accordance with EN 14351-1
- Profile rolling technology tested in accordance with EN 14024
- Sound reduction of up to 41 dB




Technical data




Single-vent side-hung window inward opening

Max. dimensions:
970 × 2370 mm (FFB×FFH)
Min. dimensions:
370 × 370 mm (FFB×FFH)
Max. vent weight: 150 kg




Bottom-hung window inward opening

Max. dimensions:
810 × 1620 mm (FFB×FFH)
or
1620 × 810 mm (FFB×FFH)
Min. dimensions:
370 × 370 mm (FFB×FFH)
Max. vent weight: 60 kg
Use weld-on hinges 555.483




Single-vent side-hung window outward opening

Max. dimensions:
970 × 2370 mm (FFB×FFH)
Min. dimensions:
470 × 370 mm (FFB×FFH)
Max. vent weight: 150 kg




Top hung window outward opening

Max. dimensions:
810 × 1610 mm (FFB×FFH)
or
1610 × 810 mm (FFB×FFH)
Min. dimensions:
370 × 470 mm (FFB×FFH)
Max. vent weight: 60 kg



Double-vent side-hung window inward opening

Max. dimensions:
1970 × 2370 mm (RFB×FFH)
Min. dimensions:
720 × 560 mm (RFB×FFH)
Access leaf min. FFB 420 mm
Max. vent weight: 150 kg




Projected top-hung window outward opening

Max. dimensions:
1160 × 1410 mm (FFB×FFH)
Min. dimensions:
300 × 300 mm (FFB×FFH)
Max. vent weight: 60 kg



Double-vent side-hung window outward opening

Max. dimensions:
1970 × 2370 mm (RFB×FFH)
Min. dimensions:
820 × 670 mm (RFB×FFH)
Access leaf min. FFB 520 mm
Max. vent weight: 150 kg




Horizontal pivot window inward and outward opening


Max. dimensions:
1370 × 1570 mm (FFB×FFH)
Max. surface 1.1881 m²
Min. dimensions:
Manual: 370 × 570 mm (FFB×FFH)
Electric: 470/670 × 370 mm (FFB×FFH)
Max. vent weight: 100 kg

FFB = Vent rebate width
FFH = Vent rebate height
RFB = Frame rebate width


Janisol Arte 2.0 profile range




601.611 Z
601.611.01
601.611.09




602.611 Z
602.611.01
602.611.09




603.611 Z
603.611.01
603.611.09




605.611 Z
605.611.01
605.611.09




602.612 Z
602.612.01
602.612.09




603.612 Z
603.612.01
603.612.09




600.609 Z




600.610 Z




601.615 Z




602.615 Z
602.615.01




603.615 Z




605.615 Z




601.610
601.610 Z
601.610.01
601.610.09



602.610
602.610 Z
602.610.01
602.610.09



603.610
603.610 Z
603.610.01
603.610.09



605.610
605.610 Z
605.610.01
605.610.09

Part no.


without addition = bright

with Z = hot-dip galvanised steel


with 01 = Stainless steel, bright, material 1.4401 (AISI 316)

with 09 = Steel KB DOCOL 355W (Corten)


Choice of glazing bead for Janisol Arte 2.0 in steel, aluminium, stainless steel and Corten




Aluminium




Steel




Steel
Stainless steel
Corten




Renoseal




Steel
Stainless steel




Aluminium



Aluminium




Aluminium



Aluminium

Example of Janisol Arte 2.0

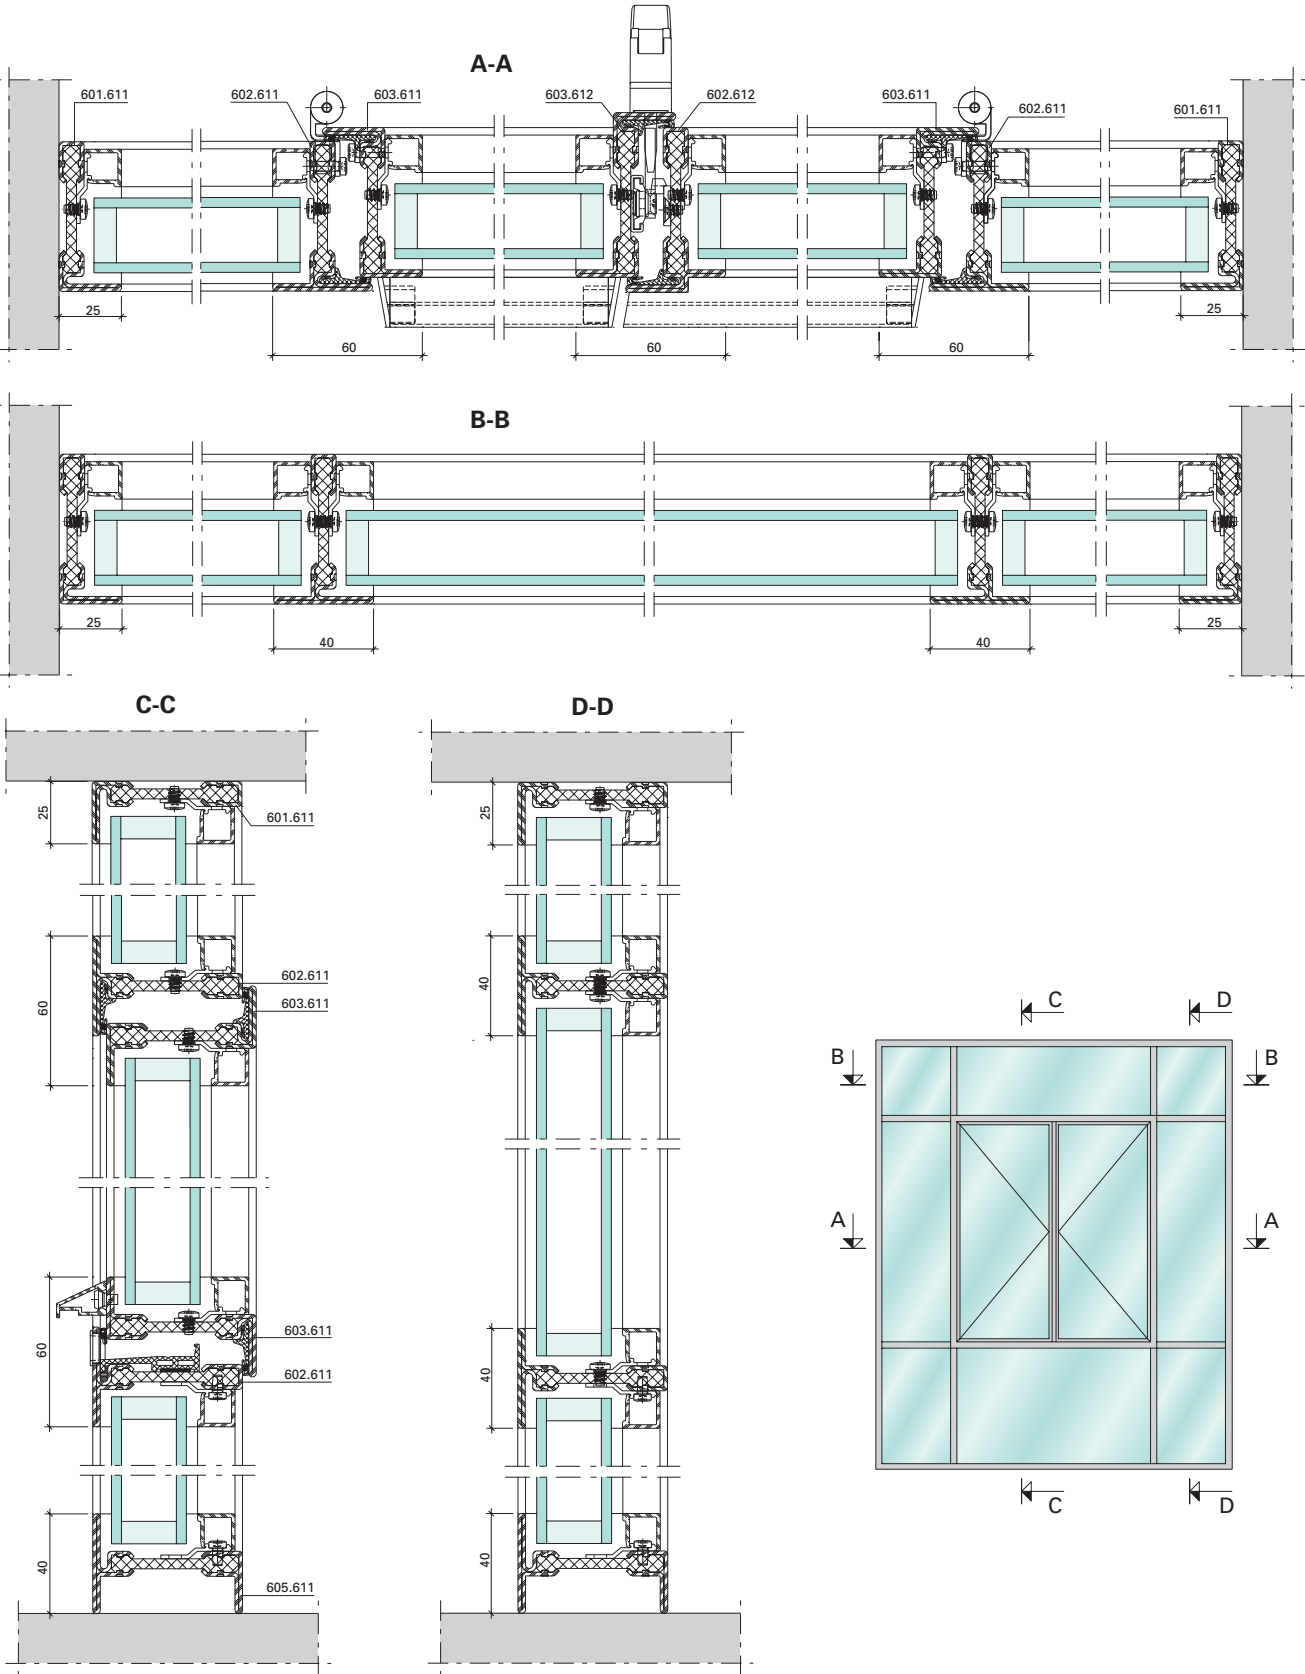

Jansen AG

Steel Systems

Industriestrasse 34
9463 Oberriet
Schweiz
jansen.com

JANSEN